

(12) UK Patent Application (19) GB (11) 2 333 209 (13) A

(43) Date of A Publication 14.07.1999

(21) Application No 9828030.8

(22) Date of Filing 18.12.1998

(30) Priority Data

(31) 10002685

(32) 08.01.1998

(33) JP

(71) Applicant(s)

Matsushita Electric Industrial Co., Ltd
(Incorporated in Japan)
1006, Oaza Kadoma, Kadoma-shi, Osaka 571, Japan

(72) Inventor(s)

Koutarou Hirai
Masayuki Yanagida
Ai Takasu

(74) Agent and/or Address for Service

Gill Jennings & Every
Broadgate House, 7 Eldon Street, LONDON,
EC2M 7LH, United Kingdom

(51) INT CL⁶

H04M 1/00, H04Q 7/32

(52) UK CL (Edition Q)

H4L LERA

H4K KBHC

(56) Documents Cited

GB 2314185 A

GB 2308038 A

GB 2296635 A

GB 2242048 A

WO 96/27974 A1

WO 91/07041 A1

(58) Field of Search

UK CL (Edition Q) G4H HRCU, H4K KBHC, H4L LECX
LERA

INT CL⁶ G08B 3/10 5/22 6/00, H04M 1/00 1/72 19/04,
H04Q 7/32


On-Line - WPI

(54) Abstract Title

Caller-influenced call notification at called mobile terminal

(57) A portable terminal device of a calling party individually sets a sounding pattern to be used for reporting an incoming call, and a called party is informed of the thus-set sounding pattern. As a result, when the terminal device of the called party makes the thus-set sounding pattern, the terminal device enables the user to immediately identify the calling party. In addition to sound 8, blinks of light 10, vibration of a vibrator 12, or the colour of the backlight 13 can be used solely or in combination to identify the calling party. Further, so long as the portable terminal device is provided with display means 4 capable of displaying characters, in addition to the incoming call reporting means, a simple message can be indicated on the portable terminal device. Consequently, the called party can immediately ascertain the nature of the call without directly talking with the calling party through the portable terminal device.

FIG. 1

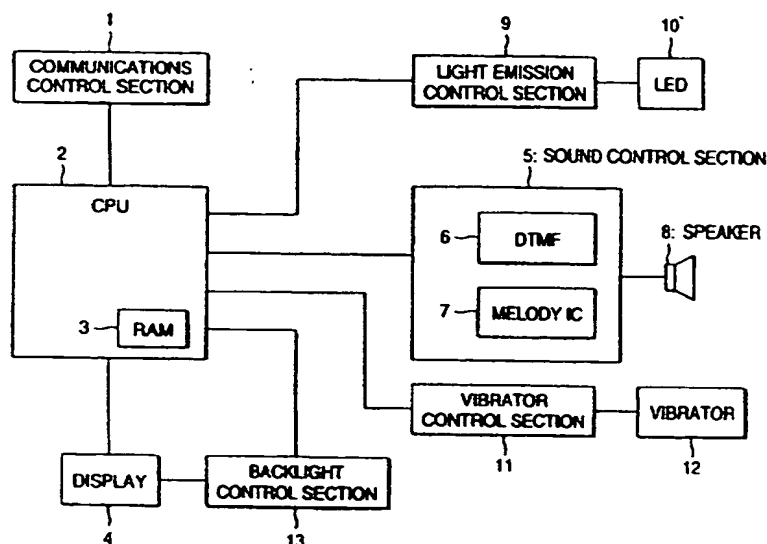

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

FIG. 1

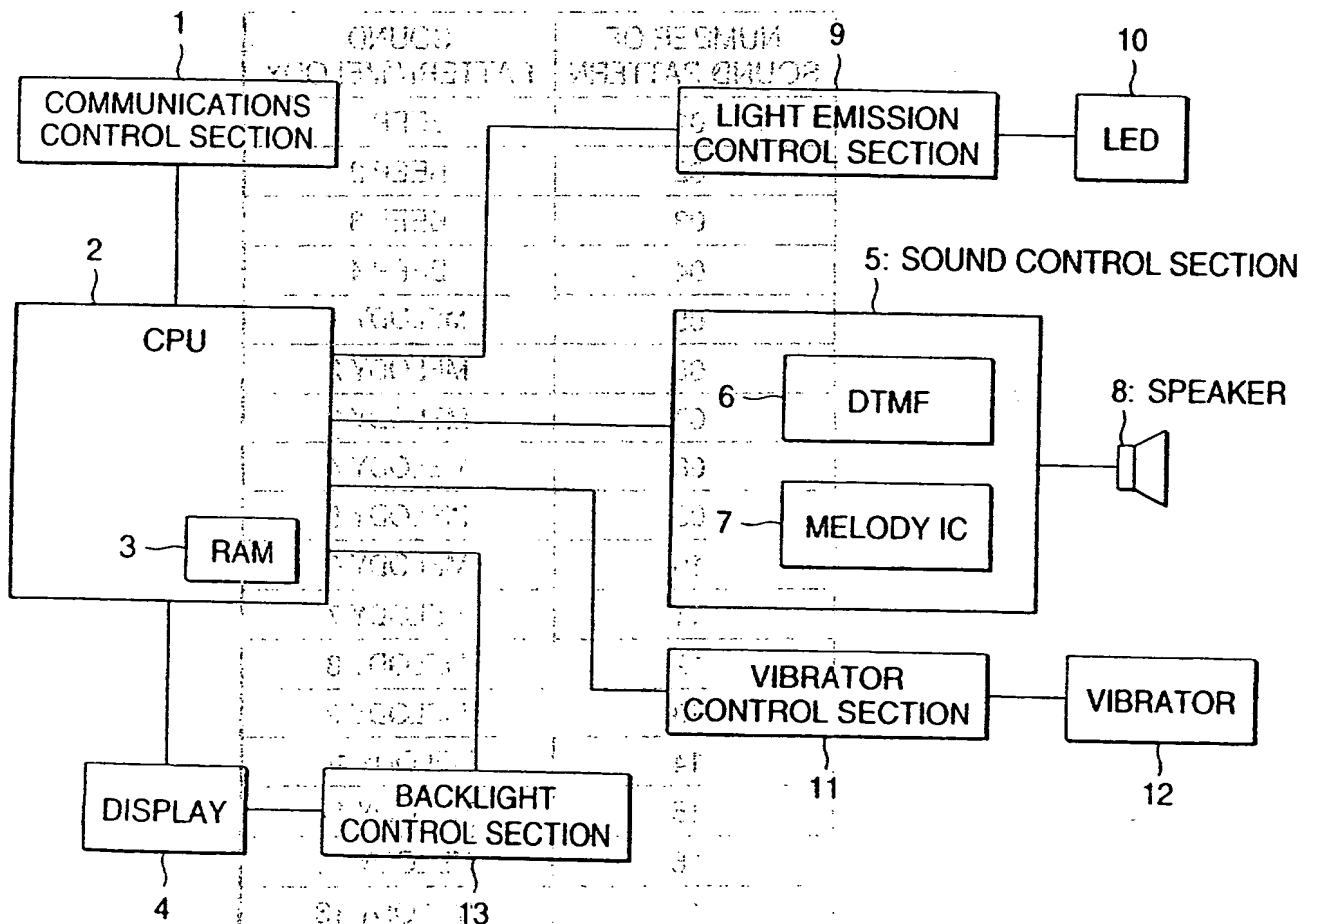


FIG. 2

NUMBER OF SOUND PATTERN	SOUND PATTERN/MELODY
01	BEEP 1
02	BEEP 2
03	BEEP 3
04	BEEP 4
05	MELODY 1
06	MELODY 2
07	MELODY 3
08	MELODY 4
09	MELODY 5
10	MELODY 6
11	MELODY 7
12	MELODY 8
13	MELODY 9
14	MELODY 10
15	MELODY 11
16	MELODY 12
17	MELODY 13
18	ORIGINAL MELODY

FIG. 3

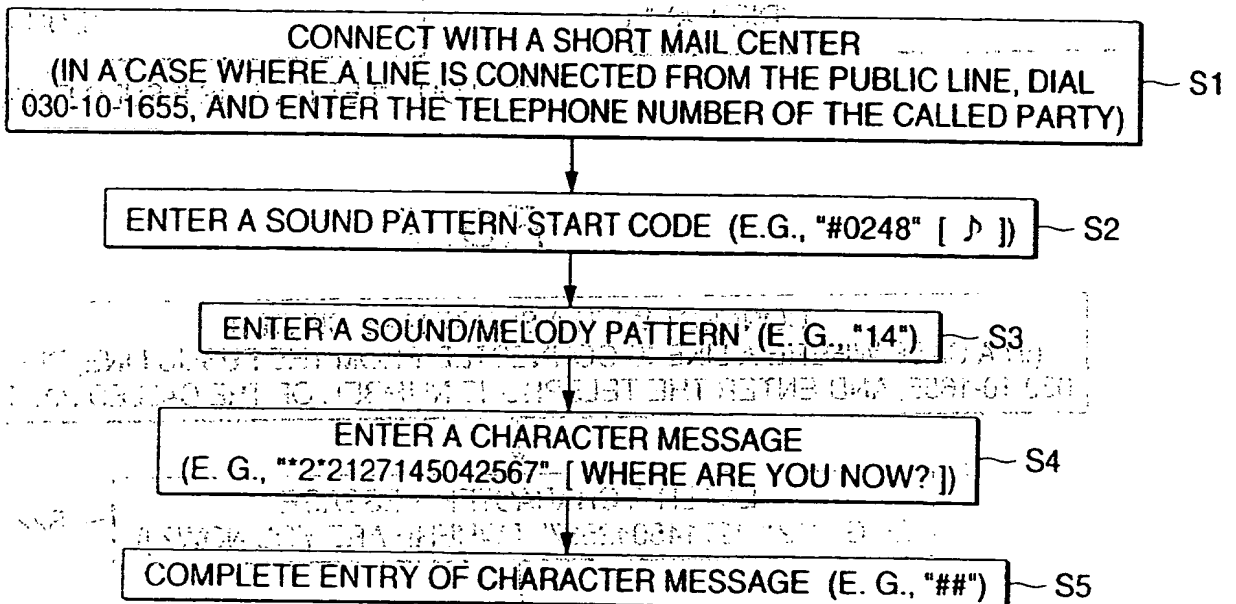


FIG. 4

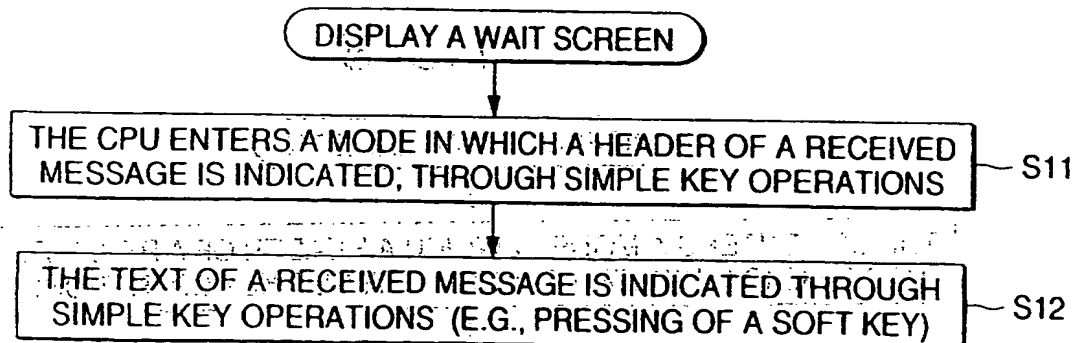


FIG. 5

RECEIVED MAIL
20TH 16:40
" ♪ 14 WHERE ARE YOU NOW?"
"DISPLAY"

FIG. 6

" ♪ 14 WHERE ARE YOU NOW?"
"EDITION"

(MELODY "LET IT BE" IS ISSUED FROM SPEAKER)

FIG. 7

CONNECT WITH A SHORT MAIL CENTER
(IN A CASE WHERE A LINE IS CONNECTED FROM THE PUBLIC LINE, DIAL 030-10-1655, AND ENTER THE TELEPHONE NUMBER OF THE CALLED PARTY)

S21

ENTER A CHARACTER MESSAGE
(E. G., "**2*2127145042567" [WHERE ARE YOU NOW?])

S22

ENTER A SOUND PATTERN START CODE (E.G., "#0248" [♪])

S23

ENTER A SOUND/MELODY PATTERN (E. G., "14")

S24

COMPLETE ENTRY OF CHARACTER MESSAGE (E. G., "##")

S25

FIG. 8

DISPLAY A WAIT SCREEN

THE CPU ENTERS A MODE IN WHICH A HEADER OF A RECEIVED MESSAGE IS INDICATED THROUGH SIMPLE KEY OPERATIONS

S31

THE TEXT OF A RECEIVED MESSAGE IS INDICATED THROUGH SIMPLE KEY OPERATIONS (E.G., PRESSING OF A SOFT KEY)

S32

FIG. 9


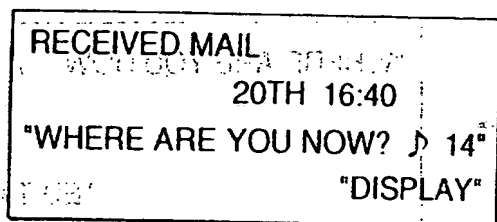


FIG. 10

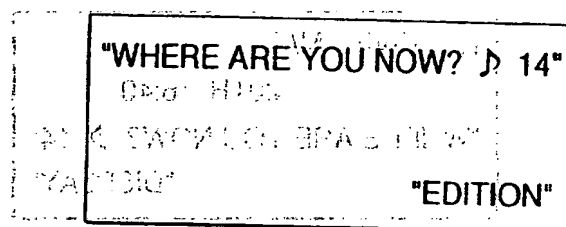

(MELODY 14 IS ISSUED FROM SPEAKER)

FIG. 11

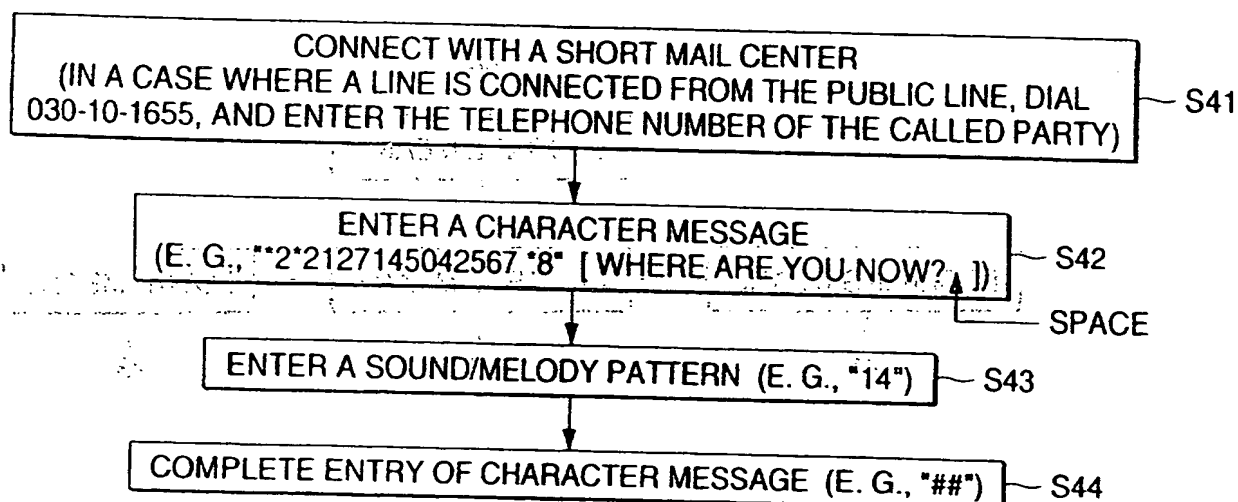


FIG. 12


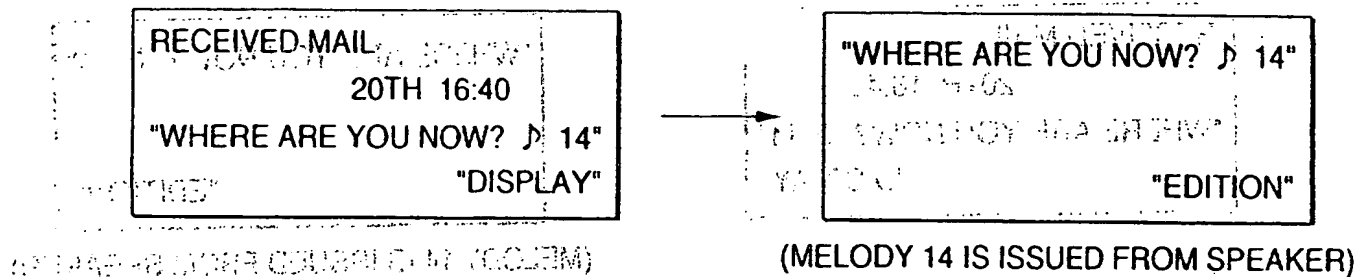


FIG. 13

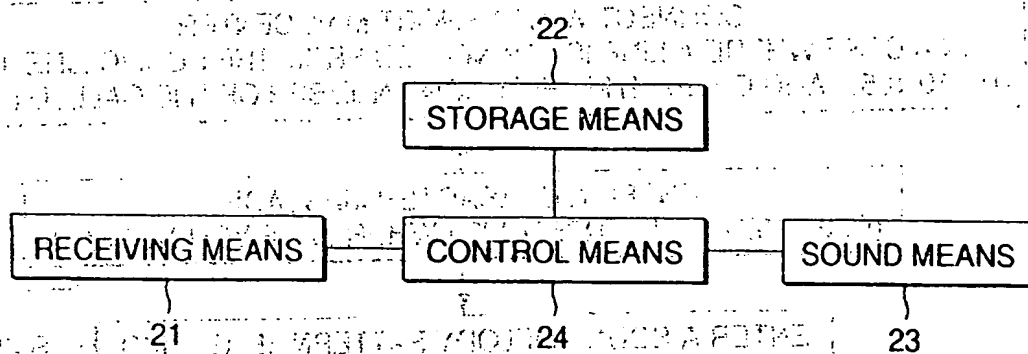

PORTABLE TERMINAL DEVICE

The present invention relates to a portable terminal device which enables a user to identify a calling party through use of a sound pattern, a blink pattern, a vibration pattern, or a backlight color, all of which are set by another portable terminal device.

Recent portable terminal devices have shown a distinguished tendency to pursue a higher level of function, such as that represented by a digital portable cellular phone. Even in a case where an incoming call is reported to the user by way of a sounding tone, a plurality of sound patterns for reporting an incoming call are available. The user can set his portable terminal device so that an incoming call can be reported according to selection of his favorite sound pattern from the available sound patterns.

FIG. 13 is a functional block diagram schematically showing the configuration of an incoming call sound section disposed in a conventional portable terminal device of this type. In FIG. 13, reference numeral 21 designates receiving means for receiving a signal wave transmitted from another portable terminal device; 22 designates storage means for storing at least two sound data sets; 23 designates sounding means capable of reporting the arrival of an incoming call by means of at least two sound data sets; and 24 designates control

means for controlling the sounding means 23 on the basis of the data sets selected from at least the two sound data sets stored in the storage means 22.

In the portable terminal device having such a configuration, the sounding means 23 is activated according to a sounding pattern set by the user. In the case of a portable terminal device capable of setting two sounding patterns, e.g., setting a beep as a first sound data set and setting a melody as a second sound data set, the user selects either the first sound data set or the second sound data set stored in the storage means 22, by way of the control means 24. When an incoming call is received from another portable terminal device, the receiving means 21 of the portable terminal device recognizes the arrival of the incoming call, and the control means activates the sounding means 23 on the basis of the sound data set selected by the user.

In the conventional portable terminal device, the sounding means can be activated solely according to the sounding pattern set by the user of the terminal device. Although the sounding pattern can be arbitrarily changed, the user cannot ascertain the identity of the calling party before he talks with the calling party by means of the terminal device.

25

The present invention has been conceived to solve the problem of the conventional portable terminal device,

and the object of the present invention is to provide a portable terminal device which enables the user to immediately identify a calling party by utilization of a sounding pattern issued for reporting the arrival of an incoming call to the user.

To this end, according to the present invention, another portable terminal device individually sets a sounding pattern to be used for reporting an incoming call, and a called party is informed of the thus-set sounding pattern beforehand. As a result, when the terminal device of the called party makes the thus-set sounding pattern, the terminal device enables the user to immediately specify the calling party for the call.

In addition to sound, blinking of light, vibration of a vibrator and the color of backlight used for a display may be utilized for reporting an incoming call. So long as a plurality of patterns of blinks, vibrations, or color are prepared and these patterns are set on a portable terminal device of the calling party, the called party can identify the calling party in the same manner as mentioned previously.

Further, through use of two or more of sound patterns, blink patterns, vibration patterns, and backlight colors in combination, a much greater number of calling party can be set on the portable terminal device. Further, so long as the portable terminal device is provided with display means capable of displaying characters in addition to the incoming call reporting means, a simple message can be indicated on the portable terminal device. Consequently, the called party can immediately ascertain the nature of the call without

directly talking with the calling party through the portable terminal device.

According to a first aspect of the present invention, there is provided a portable terminal device which

5 controls, on the basis of data set by a portable terminal device of a calling party, one of a sound pattern for sounding means, a vibration pattern for vibration means, and the color of backlight of display means of a portable terminal device of a called party, wherein

10 a sound pattern set by the calling party is reported to the called party beforehand; and upon receipt of an incoming call, the called party can immediately identify the calling party.

According to a second aspect of the present invention, there is provided a portable terminal device 15 which controls, on the basis of data set by a portable terminal device of a calling party, at least two of a sound pattern for sounding means, a vibration pattern for vibration means, and the color of backlight of display means of a portable terminal device of a called party 20 in combination, wherein

a sound pattern set by the calling party is reported to the called party beforehand; and upon receipt of an incoming call, the called party can immediately identify the calling 25 party.

According to a third aspect of the present invention, there is provided a portable terminal device comprising receiving means for receiving a signal waveform

transmitted from a portable terminal device of a calling party;

sounding means which has at least two sound patterns and is capable of reporting an incoming call; and

5 control means which identifies, from the signal waveform received by the receiving means, sound data used for controlling the sounding means and which controls the sound pattern of the sounding means on the basis of the sound data that are identified, wherein

10 a sound pattern set by the calling party is reported to the called party beforehand; and upon receipt of an incoming call, the called party can immediately identify the calling party.

According to a fourth aspect of the present invention, the portable terminal device as defined in the third aspect is further characterized in that the sound data includes a start code for a starting sound and a pattern data set used for specifying a sound pattern, and

20 when the called party receives a signal waveform including the sound data, the sounding means is activated according to a sound pattern corresponding to the sound data set by the portable terminal device of the calling party. As a result, the sound data can be readily distinguished from the other data sets.

According to a fifth aspect of the present invention, there is provided a portable terminal device comprising: receiving means for receiving a signal waveform

transmitted from a calling party;

sounding means which has at least two sound patterns

and is capable of reporting an incoming call;

light emission means which has at least two blink

5 patterns and is capable of reporting an incoming call;

and

control means which distinguishes, from the signal

waveform received by the receiving means, sound data used

for controlling the sounding means, and blink data used

10 for controlling the light emission means, and which

controls the sounding pattern of the sounding means and

the blink pattern of the light emission means on the basis

of the sound data and the blink data that have been

distinguished. As a result, many calling parties can be

15 identified by combination of the sound pattern and the
blink pattern.

According to a sixth aspect of the present invention,

the portable terminal device as defined in the fifth

aspect is further characterized in that

20 the sound data have a common start code for starting

sounding operations and a first pattern data set for

specifying a sound pattern,

the blink data have the common start code for

starting blinking operations and a second pattern data

25 set for specifying the blink pattern,

as a result of the portable terminal device of the

called party receiving the signal waveform including the

sound data, the sounding means is activated according

to a sound pattern corresponding to the sound data set
by the calling party, and

as a result of the portable terminal device of the
called party receiving the signal waveform including the
5 blink data, the light emission means is activated
according to a blink pattern corresponding to the blink
data set by the calling party. As a result, the sound
data set and the blink data set can be readily
distinguished from other data by specifying the positions
10 of these data sets.

According to a seventh aspect of the present
invention, the portable terminal device as defined in
the fifth aspect is further characterized in that

the sound data include a first start code for
15 starting sounding operations and a first pattern data
set for specifying a sound pattern,

the blink data include a second start code for
starting blinking operations and a second pattern data
set for specifying a blink pattern,

20 as a result of the portable terminal device of the
called party receiving the signal waveform including the
sound data, the sounding means is activated according
to a sound pattern corresponding to the sound data set
by the calling party, and

25 as a result of the portable terminal device of the
called party receiving the signal waveform including the
blink data, the light emission means is activated
according to a blink pattern corresponding to the blink

data set by the calling party. As a result, the sound data set and the blink data set can be readily distinguished from other data by specifying the positions of these data sets.

- 5 According to an eighth aspect of the present invention, there is provided a portable terminal device comprising:

receiving means for receiving a signal waveform transmitted from a calling party;

- 10 sounding means which has at least two sound patterns and is capable of reporting an incoming call;

vibration means which has at least two vibration patterns and is capable of reporting an incoming call; and

- 15 control means which distinguishes, from the signal waveform received by the receiving means, sound data used for controlling the sounding means and vibration data used for controlling the vibration means and which controls the sounding pattern of the sounding means and
20 the vibration pattern of the vibration means on the basis of the sound data and the vibration data that have been distinguished. As a result, many calling parties can be identified by combination of the sound pattern and the vibration pattern.

- 25 According to a ninth aspect of the present invention, the portable terminal device as defined in the eighth aspect is further characterized in that

the sound data have a common start code for starting

sounding operations and a first pattern data set for specifying a sound pattern,

the vibration data have the common start code for starting vibrating operations and a second pattern data set for specifying the vibration pattern,

as a result of the portable terminal device of the called party receiving the signal waveform including the sound data, the sounding means is activated according to a sound pattern corresponding to the sound data set by the calling party, and

as a result of the portable terminal device of the called party receiving the signal waveform including the vibration data, the vibration means is activated according to a vibration pattern corresponding to the vibration data set by the calling party. As a result, the sound data set and the vibration data set can be readily distinguished from other data by specifying the positions of these data sets.

According to a tenth aspect of the present invention, the portable terminal device as defined in the eighth aspect is further characterized in that

the sound data include a first start code for starting sounding operations and a first pattern data set for specifying a sound pattern,

the vibration data include a second start code for starting vibrating operations and a second pattern data set for specifying a vibration pattern,

as a result of the portable terminal device of the

called party receiving the signal waveform including the sound data, the sounding means is activated according to a sound pattern corresponding to the sound data set by the calling party, and

- 5 as a result of the portable terminal device of the called party receiving the signal waveform including the vibration data, the vibration means is activated according to a vibration pattern corresponding to the vibration data set by the calling party. As a result,

- 10 the sound data set and the vibration data set can be readily distinguished from other data by specifying the positions of these data sets.

According to an eleventh aspect of the present invention, there is provided a portable terminal device

- 15 comprising:

receiving means for receiving a signal waveform transmitted from a calling party;

sounding means which has at least two sound patterns and is capable of reporting an incoming call;

- 20 display means which has at least two colors of backlight and is capable of reporting an incoming call; and

- control means which distinguishes, from the signal waveform received by the receiving means, sound data used for controlling the sounding means and illumination color data used for controlling the color of backlight of the display means and which controls the sounding pattern of the sounding means and the color of backlight of the
- 25

display means on the basis of the sound data and the illumination color data that have been distinguished. As a result, many calling parties can be identified by combination of the sound pattern and the color of backlight.

According to a twelfth aspect of the present invention, the portable terminal device as defined in the eleventh aspect is further characterized in that the sound data have a common start code for starting sounding operations and a pattern data set for specifying a sound pattern,

the illumination color data have the common start code for starting illumination operations and a color data set for specifying the color of backlight, as a result of the portable terminal device of the called party receiving the signal waveform including the sound data, the sounding means is controlled according to a sound pattern corresponding to the sound data set by the calling party, and

as a result of the portable terminal device of the called party receiving the signal waveform including the illumination color data, the display means is controlled through use of a color corresponding to the color data set by the calling party. As a result, the sound data set and the illumination color data can be readily distinguished from other data by specifying the positions of these data sets.

According to a thirteenth aspect of the present

invention, the portable terminal device as defined in the eleventh aspect is further characterized in that

the sound data include a first start code for starting sounding operations and a pattern data set for

5 specifying a sound pattern,

the illumination color data include a second start code for starting illumination operations and color data for specifying the color of backlight,

as a result of the portable terminal device of the
10 called party receiving the signal waveform including the sound data, the sounding means is controlled according

to a sound pattern corresponding to the sound data set by the calling party, and

as a result of the portable terminal device of the
15 called party receiving the signal waveform including the illumination color data, the display means is controlled through use of a color of backlight corresponding to the illumination color data set by the calling party. As a result, the sound data set and the vibration data set

20 can be readily distinguished from other data by specifying the positions of these data sets.

According to a fourteenth aspect of the present invention, there is provided a portable terminal device comprising:

25 receiving means for receiving a signal waveform transmitted from a calling party;

sounding means which has at least two sound patterns and is capable of reporting an incoming call;

- light emission means which has at least two blink patterns and is capable of reporting an incoming call;
- vibration means which has at least two vibration patterns and is capable of reporting an incoming call;
- 5 display means which has at least two colors of backlight and is capable of reporting an incoming call; and
- control means which distinguishes, from the signal waveform received by the receiving means, sound data used
- 10 for controlling the sounding means, blink data used for controlling the light emission means, vibration data used for controlling the vibration means, and illumination color data used for controlling the color of backlight of the display means, and which controls the sound pattern
- 15 of the sound means on the basis of the thus-distinguished sound data, the blink pattern of the light emission means on the basis of the thus-distinguished blink data, the vibration pattern of the vibration means on the basis of the thus-distinguished vibration data, and the color of backlight of the display means on the basis of the illumination color data. As a result, many calling parties can be identified by combination of the sound pattern, the blink pattern, the vibration pattern, and the color of backlight.
- 25 According to a fifteenth aspect of the present invention, the portable terminal device as defined in the fourteenth aspect is further characterized in that the sound data have a common start code for starting

sounding operations and a pattern data set for specifying a sound pattern,

the blink data have the common start code for starting blinking operations and a second pattern data set for specifying a blink pattern;

5 set for specifying a vibration pattern;

the vibration data having the common start code for starting vibrating operations and a third pattern data set for specifying a vibration pattern;

the illumination color data have the common start code for starting illumination operations and a color data set for specifying the color of backlight,

10 as a result of the portable terminal device of the called party receiving the signal waveform including the sound data, the sounding means is controlled according to a sound pattern corresponding to the sound data set by the calling party,

15 as a result of the portable terminal device of the called party receiving the signal waveform including the blink data, the light emission means is activated according to a blink pattern corresponding to the blink data set by the calling party,

20 as a result of the portable terminal device of the called party receiving the signal waveform including the vibration data, the vibration means is activated according to a vibration pattern corresponding to the vibration data set by the calling party, and

25 as a result of the portable terminal device of the called party receiving the signal waveform including the

illumination color data, the display means is controlled through use of a color corresponding to the color data set by the calling party. As a result, the sound data set, the blink data, the vibration data, and the illumination color data can be readily distinguished from other data by specifying the positions of these data sets.

According to a sixteenth aspect of the present invention, the portable terminal device as defined in the fourteenth aspect is further characterized in that the sound data include a first start code for starting sounding operations and a pattern data set for specifying a sound pattern,

the blink data include a second start code for starting blinking operations and second pattern data for specifying a blink pattern;

the vibration data include a third start code for starting vibration operations and third pattern data for specifying a vibration pattern;

the illumination color data include a fourth start code for starting illumination operations and color data for specifying the color of backlight,

as a result of the portable terminal device of the called party receiving the signal waveform including the sound data, the sounding means is controlled according to a sound pattern corresponding to the sound data set by the calling party,

as a result of the portable terminal device of the called party receiving the signal waveform including the

blink data, the light emission means is controlled according to a blink pattern corresponding to the blink data set by the calling party,

as a result of the portable terminal device of the

5 called party receiving the signal waveform including the vibration data, the vibration means is controlled

according to a vibration pattern corresponding to the vibration data set by the calling party,

as a result of the portable terminal device of the

10 called party receiving the signal waveform including the illumination color data, the display means is controlled

through use of a color of backlight corresponding to the illumination color data set by the calling party. As a

result, the sound data set, the blink data, the vibration

15 data, and the illumination color data can be readily

distinguished from other data by specifying the positions of these data sets.

According to a seventeenth aspect of the present

invention, the portable terminal device as defined in

20 any of the fourth, sixth, seventh, ninth, tenth, twelfth,

thirteenth, fifteenth, and sixteenth aspects is further

characterized in that one or a combination of two or more

of the sound data, the blink data, the vibration data,

and the illumination color data is/are inserted into a

25 specific position of transmission data or placed

subsequent to a specific character, without including

a start code. As a result, the sound data set, the blink

data, the vibration data, and the illumination color data

can be readily distinguished from other data by specifying the positions of these data sets.

According to an eighteenth aspect of the present invention, the portable terminal device as defined in any of the first, second, third, fifth, eighth, eleventh, and fourteenth aspects is characterized by further comprising

display means capable of displaying characters and drawings; and

10 control means capable of distinguishing character message data to be indicated on the display means, wherein the control means controls one or a combination of two or more of the sound pattern of the sound means, the blink pattern of the blink means, the vibration pattern of the vibration means, and the color of backlight of the display means. As a result, the called party can immediately ascertain the nature of the call by combination of the sound pattern and the character message data.

20 According to a nineteenth aspect of the present invention, the portable terminal device as defined in the eighteenth aspect is further characterized in that the character message data include character data and a start code for specifying a character display. As a result, the character message data can be readily distinguished from other data by specifying the position of the character message data.

25 According to a twentieth aspect of the present invention, the portable terminal device as defined in

the eighteenth aspect is further characterized in that the character message data include character data and a start code or specifying a character display appearing after one or a combination of two or more of sound data, blink data, vibration data, and illumination color data. As a result, the character message data can be readily distinguished from other data by specifying the position of the character message data.

According to a twenty-first aspect of the present invention, the portable terminal device as defined in the eighteenth aspect is further characterized in that the character message data include character data and a start code for specifying a character display appearing before one or a combination of two or more of sound data, blink data, vibration data, and illumination color data. As a result, the character message data can be readily distinguished from other data by specifying the position of the character message data.

According to a twenty-second aspect of the present invention, the portable terminal device as defined in the eighteenth aspect is further characterized in that one or a combination of two or more of sound data, blink data, vibration data, and illumination color data is/are interposed into a specific position of the character message data or placed after a specific character, without including a start code.

According to a twenty-third aspect of the present invention, the portable terminal device as defined in the eighteenth aspect is further characterized in that

the eighteenth aspect is further characterized in that, when the character message data are received, one or a combination of two or more of the sound pattern of the sound means, the blink pattern of the light emission means,

- 5 the vibration pattern of the vibration means, and the color of backlight of the display means is/are controlled. As a result, the called party can identify the person the calling party without viewing the character message.

- According to a twenty-fourth aspect of the present invention, the portable terminal device as defined in 10 the eighteenth aspect is further characterized in that, when the character message data are indicated on the display means, one or a combination of two or more of the sound pattern of the sound means, the blink pattern of the light emission means, the vibration pattern of 15 the vibration means, and the color of backlight of the display means is/are controlled. As a result, the called party can identify the calling party and can ascertain the nature of the call.

- 20 Particular embodiments in accordance with this invention will now be described with reference to the accompanying drawings; in which:-

FIG. 1 is a functional block diagram schematically showing the configuration of a portable terminal device common to embodiments of the present invention;

- 25 FIG. 2 is a table showing the relationship between the number of a sound pattern and a sound pattern/melody according to a first embodiment of the present invention;

FIG. 3 is a flowchart showing one example of sound

setting performed by a calling party according to the first embodiment;

FIG. 4 is a flowchart showing one example of sounding operations performed by a called party according to the first embodiment;

FIG. 5 is a schematic representation showing an example of a message appearing on a display as a result of the sounding operations being performed by the called party according to the first embodiment;

FIG. 6 is a schematic representation showing an example of a message appearing on a display as a result of the sounding operations being performed by the called party according to the first embodiment;

FIG. 7 is a flowchart showing one example of sound setting performed by a calling party according to a second embodiment;

FIG. 8 is a flowchart showing one example of sounding operations performed by a called party according to the second embodiment;

FIG. 9 is a schematic representation showing an example of a message appearing on a display as a result of the sounding operations being performed by the called party according to the second embodiment;

FIG. 10 is a schematic representation showing an example of a message appearing on a display as a result of the sounding operations being performed by the called party according to the second embodiment;

FIG. 11 is a flowchart showing one example of

sounding operations performed by a called party according to a third embodiment;

FIG. 12 is a schematic representation showing an example of a message appearing on a display as a result of the sounding operations being performed by the called party according to the third embodiment; and

FIG. 13 is a block diagram schematically showing the configuration of an incoming call sounding section of a conventional portable terminal device.

10

(First Embodiment)

A first embodiment of the present invention will now be described by reference to the accompanying drawings. FIG. 1 is a functional block diagram schematically showing the configuration of a portable terminal device according to the first embodiment. In FIG. 1, reference numeral 1 designates a communications control section for demodulating and decoding a signal waveform received from another portable terminal device; 2 designates a CPU which reads and controls peripheral circuits according to the thus-decoded signal; 3 designates RAM for storing a character message that is received by the portable terminal device; 4 designates a display for displaying the thus-received character message; 5 designates a sound control section for controlling sound-related operations; 6 designates a dual tone multifrequency (DTMF) circuit serving as the

15

20

25

source of a single tone; 7 designates a melody IC serving as the source of a melody; and 8 designates a speaker for issuing the sound to the outside. Further, reference numeral 9 designates a light emission control section for controlling blink-related operations; 10 designates an LED for indicating blinks of light to the outside; 11 designates a vibration control section for controlling vibration-related operations; 12 designates a vibrator for imparting vibration to the outside; and 13 designates a backlight control section for controlling the backlight of the display 4.

With regard to an incoming call receiving action of the portable terminal device having the foregoing configuration, an explanation will be given of operations of the portable terminal device required for reporting an incoming by means of sound. On the basis of a table shown in FIG. 2, a calling party sets a sound pattern to be transmitted by his portable terminal device. In this table, sound pattern numbers "01," "02," "03," "04" are assigned single tones; i.e., the musical notes "C," the "D," the "E," and the "F," respectively. Sound pattern numbers "05" and "06" are assigned common melodies, and sound pattern numbers "07" to "18" are assigned popular melodies.

The sound pattern is set according to procedures shown in FIG. 3. Provided that a communications service provider of the portable terminal device of a called party is NTT (Nippon Telegraph and Telephone Corporation)

DoCoMo Ltd. and that a call is transmitted over a public line, the calling party dials telephone number 030-10-1655 first and then the telephone number of the called party, thereby establishing a line connection with a short mail center (step S1). After ascertaining an announcement for guiding the next processing step being made by way of the portable terminal device, the calling party dials code "#0248" in order to transmit a musical note "J" representing a start code of the sound data set (step S2). In a case where the melody entitled "Let it be" shown in FIG. 2 is issued as a melody, number "14" is dialed (step S3). In a case where the user desires to send a message "Where are you now?," the calling party dials number "127145042567" subsequent to a code "*2*2" representing the start code of a free message (step S4). Finally, the calling party dials symbol "##" representing an end code of the sound data set (step S5).

In the called party's portable terminal device that has received such a transmission data set, the communications control section shown in FIG. 1 decodes the received signal, and the thus-received signal is processed by the CPU 2. The thus-processed signal is stored in the RAM 3. According to the procedures shown in FIG. 4, the called party causes the display 4 to indicate that the message is received. For example, as shown in FIG. 5, when the called party enters a menu key and a menu number, the CPU 2 enters a mode in which a header of the received character message is indicated.

on the display 4 (step S11). Further, from the code
"#0248" included in the received data set the CPU 2
recognizes that the sound data set by the calling party
are included in the received data set, thus instructing
5 the sound control section 5 to select number "14" which
represents a sound pattern corresponding to the sound
data set. The sound control section 5 stores in its
memory a table analogous to that shown in FIG. 2. While
the header of the character message is being displayed,
10 the called party presses a menu key in order to indicate
the text of the character message (step S12). As shown
in FIG. 6, the text of the character message is displayed,
and through use of the melody IC 7 the sound control
section 5 selects a melody corresponding to the number
15 "14." The thus-selected melody; i.e., "Let it be," is
output from the speaker 8. Although the melody is output
for a predetermined period of time, the user can interrupt
the melody by pressing any key.

Although in the first embodiment the timing at which
20 sound is made according to the sound pattern is set,
through a simple key operation, to the timing at which
the character message is indicated on the display 4, sound
may be made immediately when the portable terminal device
receives an incoming call, without involving any key
25 operations.

(Second Embodiment)

A second embodiment of the present invention will
now be described. Although the second embodiment

employs the portable terminal device shown in FIG. 1, which is also employed by the first embodiment, in the second embodiment the procedures according to which the calling party sets a sound pattern on his portable terminal device slightly differ from those used in the first embodiment. More specifically, as shown in FIG. 7, provided that a communications service provider of the portable terminal device of the called party is NTT (Nippon Telegraph and Telephone Corporation) DoCoMo Ltd. and that a call is transmitted over a public line, the calling party dials telephone number 030-10-1655 first and then the telephone number of the called party, thereby establishing a line connection with the short mail center (step S21), as in the case with the first embodiment. After ascertaining an announcement for guiding the next processing being made by way of the portable terminal device, the calling party dials number "*2*2127145042567" which represents "Where are you now?" (step S22). Subsequently, the calling party dials "#024" in order to transmit symbol "J" representing the start code of the sound data set (step S23) and dials number "14" representing a melody "Let it be" (step S24). Finally, the calling party dials symbol "##" representing the end code of the sound data set.

25 In the called party's portable terminal device that has received the transmission data set, the communications control section shown in FIG. 1 decodes the received signal, and the thus-received signal is

processed by the CPU 2. The thus-processed signal is stored in the RAM 3. According to the procedures shown in FIG. 8, the called party causes the display 4 to indicate that the message is received. For example, as shown in FIG. 9, when the called party enters a menu key and a menu number, the CPU 2 enters a mode in which a header of the received character message is indicated on the display 4 (step S31). Further, from the code "#0248" included in the received data set, the CPU 2 recognizes that the sound data set designated by the calling party are included in the received data set, thus instructing the sound control section 5 to select number "14" which represents a sound pattern corresponding to the sound data set. While the header of the character message is being displayed, the called party presses the menu key in order to indicate the text of the character message (step S32). As shown in FIG. 10, the text of the character message is displayed, and through use of the melody IC 7 the sound control section 5 selects a melody corresponding to the number "14." The thus-selected melody; i.e., "Let it be," is output from the speaker 8. Although the melody is output for a predetermined period of time, the user can interrupt the melody by pressing any key.

Although in the second embodiment the timing at which sound is made according to the sound pattern is set, through a simple key operation, to the timing at which the character message is indicated on the display

dials symbol "##" representing the end code of the sound data set (step S44).

In the called party's portable terminal device that has received the transmission data set, the portable

5 terminal device performs the same operations as performed

in the second embodiment. As shown in FIG. 12, the header

of the received character message is indicated on the

display 4. Subsequently, the text of the character

message is indicated, and through use of the melody IC

10 the sound control section 5 selects a melody

corresponding to the number "14." The thus-selected

melody; i.e., "Let it be," is output from the speaker

8. Although the melody is output for a predetermined

period of time, the user can interrupt the melody by

15 pressing any key.

Although in the third embodiment the timing at which

sound is made according to the sound pattern is set to

the timing at which the character message is indicated

on the display 4 through a simple key operation, sound

20 may be made immediately when the portable terminal device

receives an incoming call, without involving any key

operations.

According to the third embodiment, the free message

may be cancelled through use of "*4" representing

25 "[," "*6" representing "],," or other specific characters.

A repetitive message can be transmitted through use

of "*05" or "*044" in place of "*2*2" representing the

start of the free message. Since a two-digit code

this way, sound, blink patterns, vibration patterns, and the color of backlight can be set in several ways. As a result, as compared with a single incoming call reporting method, the present invention enables specification of a larger number of calling parties.

In a case where an incoming call is reported by blinking the LED 10, the light emission control section 9 is provided with a table. In the table, two or more blink patterns for the purpose of blinking the LED 10 are each assigned a number. In the calling party's portable terminal device, after entry of a specific code for starting the processing of the blink pattern, the number of the blink pattern is input. As a result, the called party's portable terminal device causes the LED 10 to blink according to the blink pattern. The blink pattern may be provided with variations by changing of a time interval between blinks or the intensity of a blink. For example, there is provided a set of three blinks, and the blinks may be changed in such a way that the first blink assumes high intensity and the second and third blinks assume low intensity.

Similarly, the vibrator control section 11 is provided with a table. In the table, two or more vibration patterns for the purpose of causing the vibrator 12 to vibrate are each assigned a number. In the calling party's portable terminal device, after entry of a specific code for starting the processing of the vibration pattern, the number of the vibration pattern

is input. As a result, the called party's portable terminal device causes the vibrator 12 to vibrate on the basis of the vibration pattern. The vibration pattern may be provided with variations by causing the vibrator
5 to vibrate intermittently so as to change a time interval between vibrations or by changing the intensity of vibration. For example, there is provided a set of three vibrations, and the vibrations may be changed in such a way that the first vibration is strong and the second
10 and third vibrations are weak.

Further, the backlight control section 13 is provided with a table. In the table, two or more color data sets for the purpose of changing the color of backlight of the display 4 are each assigned a number.
15 In the calling party's portable terminal device, after entry of a specific code for starting the color of the display, the number of the color data set is input. As a result, the called party's portable terminal device changes the color of backlight of the display 4 on the
20 basis of the color data set. The color of backlight of the display 4 may be changed by switching between a plurality of lamps of different colors, by mixture of the lamps, or by changing of the display positions of the lamps.

25 An incoming call may be reported by combination of the aforementioned elements; i.e., blink patterns, vibration patterns, and the color of backlight, in various manners. In principle, sound is used for

reporting an incoming call. However, if sound will cause inconvenience to another person, another combination of these elements may be effective. To realize the other combination, in the portable terminal device of the calling party, entry of a specific common code for starting the combination will be followed by entry of the number of each of the patterns. Alternatively, a pair comprising a unique specific code and the number of a pattern may be input separately.

10 In the case of a portable terminal device not having a display for indicating a character message, only sound from a speaker, blinks of the LED, and vibration of the vibrator are available.

As mentioned above, in a portable terminal device
15 according to the present invention, a portable terminal device of a calling party sets a sound pattern used for reporting an incoming call, and a called party is informed of the thus-set sound pattern beforehand. When sound is issued according to this sound pattern, the called party
20 can immediately identify the calling party. Further, an incoming call may be reported by utilization of blinks of light, the vibration of a vibrator, and backlight of a display, in addition to sound. So long as a plurality of patterns for these elements are prepared and the
25 calling party sets the patterns, the called party can immediately identify the calling party, in the same manner as mentioned previously. By combination of two or more of sound, blink patterns, vibration patterns,

CHIAIR

and backlight, various patterns become available, which
in turn enables the called party to identify many more
calling parties. Further, if the portable terminal
device is provided with display means capable of
5 indicating characters in addition to the incoming call
reporting means, a message to be used for reporting the
nature of the call can be displayed. As a result, the
called party can immediately ascertain the nature of the
call without talking by way of the portable terminal
10 device.

CLAIMS

1. A portable terminal device comprising:
sounding means,
vibration means, and
5 display means, which controls,
on the basis of data set by a portable terminal device
of a calling party,
one of a sound pattern for sounding means, a
vibration pattern for vibration means, and the color of
10 backlight of display means of a portable terminal device
of a called party.
2. A portable terminal device comprising:
sounding means,
15 vibration means, and
display means, which controls,
on the basis of data set by a portable terminal device
of a calling party,
at least two of a sound pattern for sounding means,
20 a vibration pattern for vibration means, and the color
of backlight of display means of a portable terminal
device of a called party in combination.

3. A portable terminal device comprising:

receiving means for receiving a signal waveform transmitted from a portable terminal device of a calling party;

5. sounding means which has at least two sound patterns and is capable of reporting an incoming call;

control means which identifies, from the signal waveform received by said receiving means, sound data used for controlling said sounding means and which controls the sound pattern of said sounding means on the basis of the sound data that are identified.

4. The portable terminal device of Claim 3, wherein the sound data includes a start code for a starting sound and a pattern data set used for specifying a sound pattern, and

when the called party receives a signal waveform including the sound data, said sounding means is activated according to a sound pattern corresponding to the sound data set by said portable terminal device of the calling party.

5. A portable terminal device comprising:
receiving means for receiving a signal waveform
transmitted from a calling party;
sounding means which has at least two sound
5 patterns and is capable of reporting an incoming call;
light emission means which has at least two blink
patterns and is capable of reporting an incoming call;
and
control means which distinguishes, from the
10 signal waveform received by said receiving means, sound
data used for controlling said sounding means, and blink
data used for controlling said light emission means, and
which controls the sounding pattern of said sounding
means and the blink pattern of said light emission means
15 on the basis of the sound data and the blink data that
have been distinguished.

6. The portable terminal device of Claim 5, wherein
the sound data have a common start code for
20 starting sounding operations and a first pattern data
set for specifying a sound pattern;

the blink data have the common start code for
starting blinking operations and a second pattern data
set for specifying the blink pattern;

25 as a result of said portable terminal device of
the called party receiving the signal waveform including
the sound data, said sounding means is activated
according to a sound pattern corresponding to the sound

data set by the calling party; and

as a result of said portable terminal device of
the called party receiving the signal waveform including
the blink data, said light emission means is activated
5 according to a blink pattern corresponding to the blink
data set by the calling party.

7. The portable terminal device of Claim 5, wherein
the sound data includes a first start code for
10 starting sounding operations and a first pattern data
set for specifying a sound pattern;

the blink data includes a second start code for
starting blinking operations and a second pattern data
set for specifying a blink pattern;

15 as a result of said portable terminal device of
the called party receiving the signal waveform including
the sound data, said sounding means is activated
according to a sound pattern corresponding to the sound
data set by the calling party; and

20 as a result of said portable terminal device of
the called party receiving the signal waveform including
the blink data, said light emission means is activated
according to a blink pattern corresponding to the blink
data set by the calling party.

8. A portable terminal device comprising:
receiving means for receiving a signal waveform
transmitted from a calling party;
sounding means which has at least two sound
5 patterns and is capable of reporting an incoming call;
vibration means which has at least two vibration
patterns and is capable of reporting an incoming call;
and
control means which distinguishes, from the
10 signal waveform received by said receiving means, sound
data used for controlling said sounding means and
vibration data used for controlling said vibration means
and which controls the sounding pattern of said sounding
means and the vibration pattern of said vibration means
15 on the basis of the sound data and the vibration data
that have been distinguished.

9. The portable terminal device of Claim 8, wherein
the sound data has a common start code for starting
20 sounding operations and a first pattern data set for
specifying a sound pattern;
the vibration data has the common start code for
starting vibrating operations and a second pattern data
set for specifying the vibration pattern;
25 as a result of said portable terminal device of
the called party receiving the signal waveform including
the sound data, said sounding means is activated
according to a sound pattern corresponding to the sound

data set by the calling party; and

- as a result of said portable terminal device of the called party receiving the signal waveform including the vibration data, said vibration means is activated according to a vibration pattern corresponding to the vibration data set by the calling party.

10. The portable terminal device of Claim 8, wherein the sound data includes a first start code for starting sounding operations and a first pattern data set for specifying a sound pattern;

- the vibration data includes a second start code for starting vibrating operations and a second pattern data set for specifying a vibration pattern;

- 15 as a result of said portable terminal device of the called party receiving the signal waveform including the sound data, said sounding means is activated according to a sound pattern corresponding to the sound data set by the calling party; and

- 20 as a result of said portable terminal device of the called party receiving the signal waveform including the vibration data, said vibration means is activated according to a vibration pattern corresponding to the vibration data set by the calling party.

11. A portable terminal device comprising:
receiving means for receiving a signal waveform
transmitted from a calling party;
sounding means which has at least two sound
5 patterns and is capable of reporting an incoming call;
display means which has at least two colors of
backlight and is capable of reporting an incoming call;
and
control means which distinguishes, from the
10 signal waveform received by said receiving means, sound
data used for controlling said sounding means and
illumination color data used for controlling the color
of backlight of said display means and which controls
the sounding pattern of said sounding means and the color
15 of backlight of said display means on the basis of the
sound data and the illumination color data that have been
distinguished.

12. The portable terminal device of Claim 11, wherein
20 the sound data have a common start code for
starting sounding operations and a pattern data set for
specifying a sound pattern;
the illumination color data have the common start
code for starting illumination operations and a color
25 data set for specifying the color of backlight;

as a result of said portable terminal device of
the called party receiving the signal waveform including
the sound data, said sounding means is controlled

according to a sound pattern corresponding to the sound data set by the calling party; and

as a result of said portable terminal device of the called party receiving the signal waveform including the illumination color data, said display means is controlled through use of a color corresponding to the color data set by the calling party.

13. The portable terminal device of Claim 11, wherein the sound data includes a first start code for starting sounding operations and a pattern data set for specifying a sound pattern;

the illumination color data includes a second start code for starting illumination operations and color data for specifying the color of backlight;

as a result of said portable terminal device of the called party receiving the signal waveform including the sound data, said sounding means is controlled according to a sound pattern corresponding to the sound data set by the calling party; and

as a result of said portable terminal device of the called party receiving the signal waveform including the illumination color data, said display means is controlled through use of a color of backlight corresponding to the illumination color data set by the calling party.

14. A portable terminal device comprising:
receiving means for receiving a signal waveform
transmitted from a calling party;
sounding means which has at least two sound
5 patterns and is capable of reporting an incoming call;
light emission means which has at least two blink
patterns and is capable of reporting an incoming call;
vibration means which has at least two vibration
patterns and is capable of reporting an incoming call;
10 display means which has at least two colors of
backlight and is capable of reporting an incoming call;
and
control means which distinguishes, from the
signal waveform received by said receiving means, sound
15 data used for controlling said sounding means, blink data
used for controlling said light emission means, vibration
data used for controlling said vibration means, and
illumination color data used for controlling the color
of backlight of said display means, and which controls
20 the sound pattern of said sound means on the basis of
the thus-distinguished sound data, the blink pattern of
said light emission means on the basis of the thus-
distinguished blink data, the vibration pattern of said
vibration means on the basis of the thus-distinguished
25 vibration data, and the color of backlight of said display
means on the basis of the illumination color data.

15. The portable terminal device of Claim 14, wherein
the sound data have a common start code for
starting sounding operations and a pattern data set for
specifying a sound pattern;
- 5 the blink data have the common start code for
starting blinking operations and a second pattern data
set for specifying a blink pattern;
- the vibration data having the common start code
for starting vibrating operations and a third pattern
data set for specifying a vibration pattern;
- 10 the illumination color data have the common start
code for starting illumination operations and a color
data set for specifying the color of backlight;
- as a result of said portable terminal device of
the called party receiving the signal waveform including
15 the sound data, said sounding means is controlled
according to a sound pattern corresponding to the sound
data set by the calling party;
- as a result of said portable terminal device of
the called party receiving the signal waveform including
20 the blink data, said light emission means is activated
according to a blink pattern corresponding to the blink
data set by the calling party;
- as a result of said portable terminal device of
the called party receiving the signal waveform including
25 the vibration data, said vibration means is activated
according to a vibration pattern corresponding to the
vibration data set by the calling party; and

as a result of said portable terminal device of
the called party receiving the signal waveform including
the illumination color data, said display means is
controlled through use of a color corresponding to the
color data set by the calling party.

16. The portable terminal device of Claim 14, wherein
the sound data include a first start code for
starting sounding operations and a pattern data set for
specifying a sound pattern,
the blink data include a second start code for
starting blinking operations and second pattern data for
specifying a blink pattern;
the vibration data include a third start code for
starting vibration operations and third pattern data for
specifying a vibration pattern;
the illumination color data include a fourth
start code for starting illumination operations and color
data for specifying the color of backlight,

20 as a result of said portable terminal device of
the called party receiving the signal waveform including
the sound data, said sounding means is controlled
according to a sound pattern corresponding to the sound
data set by the calling party,

25 as a result of said portable terminal device of
the called party receiving the signal waveform including
the blink data, said light emission means is controlled
according to a blink pattern corresponding to the blink

data set by the calling party,

as a result of said portable terminal device of
the called party receiving the signal waveform including
the vibration data, said vibration means is controlled
5 according to a vibration pattern corresponding to the
vibration data set by the calling party,

as a result of said portable terminal device of
the called party receiving the signal waveform including
the illumination color data, said display means is
10 controlled through use of a color of backlight
corresponding to the illumination color data set by the
calling party.

17. The portable terminal device of Claim 4, wherein
15 one or a combination of two or more of the sound
data, the blink data, the vibration data, and the
illumination color data is/are inserted into a specific
position of transmission data or placed subsequent to
a specific character, without including a start code.
20

18. The portable terminal device of Claim 6, wherein
one or a combination of two or more of the sound
data, the blink data, the vibration data, and the
illumination color data is/are inserted into a specific
25 position of transmission data or placed subsequent to
a specific character, without including a start code.

19. The portable terminal device of Claim 7, wherein one or a combination of two or more of the sound data, the blink data, the vibration data, and the illumination color data is/are inserted into a specific position of transmission data or placed subsequent to a specific character, without including a start code.

20. The portable terminal device of Claim 9, wherein one or a combination of two or more of the sound data, the blink data, the vibration data, and the illumination color data is/are inserted into a specific position of transmission data or placed subsequent to a specific character, without including a start code.

21. The portable terminal device of Claim 10, wherein one or a combination of two or more of the sound data, the blink data, the vibration data, and the illumination color data is/are inserted into a specific position of transmission data or placed subsequent to a specific character, without including a start code.

22. The portable terminal device of Claim 12, wherein one or a combination of two or more of the sound data, the blink data, the vibration data, and the illumination color data is/are inserted into a specific position of transmission data or placed subsequent to a specific character, without including a start code.

23. The portable terminal device of Claim 13, wherein one or a combination of two or more of the sound data, the blink data, the vibration data, and the illumination color data is/are inserted into a specific position of transmission data or placed subsequent to a specific character, without including a start code.
24. The portable terminal device of Claim 15, wherein one or a combination of two or more of the sound data, the blink data, the vibration data, and the illumination color data is/are inserted into a specific position of transmission data or placed subsequent to a specific character, without including a start code.
25. The portable terminal device of Claim 16, wherein one or a combination of two or more of the sound data, the blink data, the vibration data, and the illumination color data is/are inserted into a specific position of transmission data or placed subsequent to a specific character, without including a start code.
26. The portable terminal device of Claim 1, further comprising:
display means capable of displaying characters and drawings; and
control means capable of distinguishing character message data to be indicated on said display means, wherein

said control means controls one or a combination of two or more of the sound pattern of said sound means, the blink pattern of said blink means, the vibration pattern of said vibration means, and the color of backlight of said display means.

27. The portable terminal device of Claim 2, further comprising:

display means capable of displaying characters and drawings; and

control means capable of distinguishing character message data to be indicated on said display means, wherein

said control means controls one or a combination of two or more of the sound pattern of said sound means, the blink pattern of said blink means, the vibration pattern of said vibration means, and the color of backlight of said display means.

28. The portable terminal device of Claim 3, further comprising:

display means capable of displaying characters and drawings; and

control means capable of distinguishing character message data to be indicated on said display means, wherein

said control means controls one or a combination of two or more of the sound pattern of said sound means,

the blink pattern of said blink means, the vibration pattern of said vibration means, and the color of backlight of said display means.

- 5 29. The portable terminal device of Claim 5, further comprising:

display means capable of displaying characters and drawings; and

- 10 control means capable of distinguishing character message data to be indicated on said display means, wherein

- 15 said control means controls one or a combination of two or more of the sound pattern of said sound means, the blink pattern of said blink means, the vibration pattern of said vibration means, and the color of backlight of said display means.

30. The portable terminal device of Claim 8, further comprising:

20 display means capable of displaying characters and drawings; and

control means capable of distinguishing character message data to be indicated on said display means, wherein

- 25 said control means controls one or a combination of two or more of the sound pattern of said sound means, the blink pattern of said blink means, the vibration pattern of said vibration means, and the color of

backlight of said display means.

31. The portable terminal device of Claim 11, further comprising:

5 display means capable of displaying characters and drawings; and

control means capable of distinguishing character message data to be indicated on said display means, wherein

10 said control means controls one or a combination of two or more of the sound pattern of said sound means, the blink pattern of said blink means, the vibration pattern of said vibration means, and the color of backlight of said display means.

15 32. The portable terminal device of Claim 14, further comprising:

display means capable of displaying characters and drawings; and

20 control means capable of distinguishing character message data to be indicated on said display means, wherein

25 said control means controls one or a combination of two or more of the sound pattern of said sound means, the blink pattern of said blink means, the vibration pattern of said vibration means, and the color of backlight of said display means.

33. The portable terminal device of any one of Claims 26 to 32, wherein

the character message data includes character data and a start code for specifying a character display.

5

34. The portable terminal device of any one of Claims 26 to 32, wherein

the character message data includes character data and a start code or specifying a character display

10 appearing after one or a combination of two or more of sound data, blink data, vibration data, and illumination color data.

15 35. The portable terminal device of any one of Claims 26 to 32, wherein

the character message data includes character data and a start code for specifying a character display appearing before one or a combination of two or more of sound data, blink data, vibration data, and illumination color data.

20

36. The portable terminal device of any one of Claims 26 to 32, wherein

25 one or a combination of two or more of sound data, blink data, vibration data, and illumination color data is/are interposed into a specific position of the character message data or placed after a specific character, without including a start code.

37. The portable terminal device of any one of Claims 26 to 32, wherein

when the character message data are received, one or a combination of two or more of the sound pattern of said sound means, the blink pattern of said light emission means, the vibration pattern of said vibration means, and the color of backlight of said display means is/are controlled.

10

38. The portable terminal device of any one of Claims 26 to 32, wherein

when the character message data are indicated on said display means, one or a combination of two or more of the sound pattern of said sound means, the blink pattern of said light emission means, the vibration pattern of said vibration means, and the color of backlight of said display means is/are controlled.

39. A particular terminal device substantially as described with reference to Figures 1 to 12 of the accompanying drawings.



The Patent Office

53



INVESTOR IN PEOPLE

Application No: GB 9828030.8
Claims searched: 1 to 39

Examiner: Jared Stokes
Date of search: 29 April 1999

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.Q): G4H (HRCU)
H4K (KBHC)
H4L (LECX, LERA)

Int CI (Ed.6): G08B (3/10, 5/22, 6/00)
H04M (1/00, 1/72, 19/04)
H04Q (7/32)

Other: On-Line - WPI

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X, Y	GB 2 314 185 A (NEC) See page 9 line 20-page 11 line 2, page 15 lines 11-15, figs 9d & 9f	X: 3,8 at least Y: 1,2,3, 5,8,11,14 at least
Y	GB 2 308 038 A (Nokia) See whole document, especially page 2 lines 1-7	1,2,3,5,8, 11,14 at least
X, Y	GB 2 296 635 A (Motorola) See page 9 line 6-page 10 line 20	X: 3,8 at least Y: 1,2,3, 5,8,11,14 at least
Y	GB 2 242 048 A (NEC) See abstract	1,2,5, 11,14 at least

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



The Patent Office



INVESTOR IN PEOPLE

54

Application No: GB 9828030.8

Examiner: Jared Stokes

Claims searched: 1 to 39

Date of search: 29 April 1999

Category	Identity of document and relevant passage	Relevant to claims
Y	WO 96/27974 A1 (Ericsson) See page 13 line 20-page 14 line 38	1,2,3,5,8, 11,14 at least
Y	WO 91/07041 A1 (Anderson) See abstract	1,2,3,5,8 11,14 at least

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

An Executive Agency of the Department of Trade and Industry

UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Office
Washington, D.C. 20590



UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Office

Washington, D.C. 20590

Patent Office

Washington, D.C. 20590

UNITED STATES PATENT AND TRADEMARK OFFICE
Patent Office
Washington, D.C. 20590

UNITED STATES PATENT AND TRADEMARK OFFICE
Patent Office
Washington, D.C. 20590


UNITED STATES PATENT AND TRADEMARK OFFICE
Patent Office

UNITED STATES PATENT AND TRADEMARK OFFICE
Patent Office

THIS PAGE BLANK (USPTO)

UNITED STATES PATENT AND TRADEMARK OFFICE
Patent Office
Washington, D.C. 20590

UNITED STATES PATENT AND TRADEMARK OFFICE
Patent Office
Washington, D.C. 20590

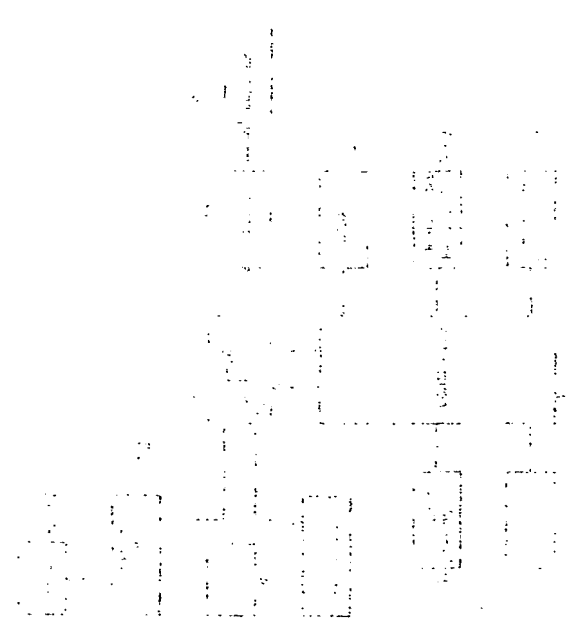

UNITED STATES PATENT AND TRADEMARK OFFICE
Patent Office
Washington, D.C. 20590

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)